


STAINLESS STEEL SLIM COUNTETOP 10" x 2"



www.carelux.com.au



2 0452435477





Reduction Claim

Sediments	3
-----------	---

Chlorine

Pesticides & Herbicides

VOCs (Acetone, Alcohol, Acetic Acid, Ethanol..)

Taste, Odours & Colour

Heavy Metals (Copper, Arsenic, Mercury, Lead...)

Parasites


Bacteria

Viruses

Fluorides

Chloramines

Screw In Slim Ceramic Filter

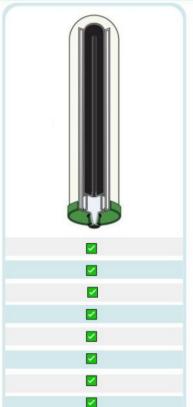



- 1 Inlet*
- UltraCeram® Cartridge
- Assembled Housing'
- Spout*
- Outlet*
- Female Tap Adaptor
- Universal Adaptor
- Diverter Valve*

*Pure Stainless Steel



Our systems are connected to your existing kitchen faucet and are supplied with an adaptor and a diverter to connect to your faucet.

NOTE: An external thread on the faucet indicates a male fitting. An internal thread indicates a female fitting.





NSF Tested & Certified Cartridge 0.5 micron absolute

Ceramic Outer Shell

The ceramic outer shell is made from Diatomaceous Earth formed from millions of microscopic silicone shells - compressed to give a 0.5 micron absolute rating to remove the finest sediment, bacteria and parasites.

Impregnated with silver ions the ceramic media has enhanced bacteriostatic and self sterilizing properties to inhibit bacteria growth.

Carbon Block Inner Core

The carbon block inner core is NSF tested to remove chlorine, chloramines, bad taste and odour to NSF/ANSI 42 and chemicals, pesticides and heavy metals to NSF/ANSI 53.

SPECIFICATIONS

Dimensions 60 W x 300 H mm Flow Rate 3 LPM Connects To: 1/2" Kitchen Faucet Spout

Note: Flush the system for a few minutes before use. This will remove non-toxic carbon fines and oxygen (air bubbles) from the new cartridges.

Filter is rated to last 2,000 litres.

However, replacement frequency depends on water quality and usage.

Every Year 222 Every 18 Months 22 Every Two Years

\$55 Approx.





NSF CERTIFIED & WATERMARK APPROVED WATER FILTERS

- 1. Find a convenient countertop location to place the filter system in reach of your faucet.
- 2. Unscrew the existing aerator from your faucet.
- 3. An external thread indicates a male fitting, while and interior thread indicates a female fitting.
- -With a female fitting, first screw the standard adaptor, then the diverter.
- With a male fitting, screw on the diverter.